
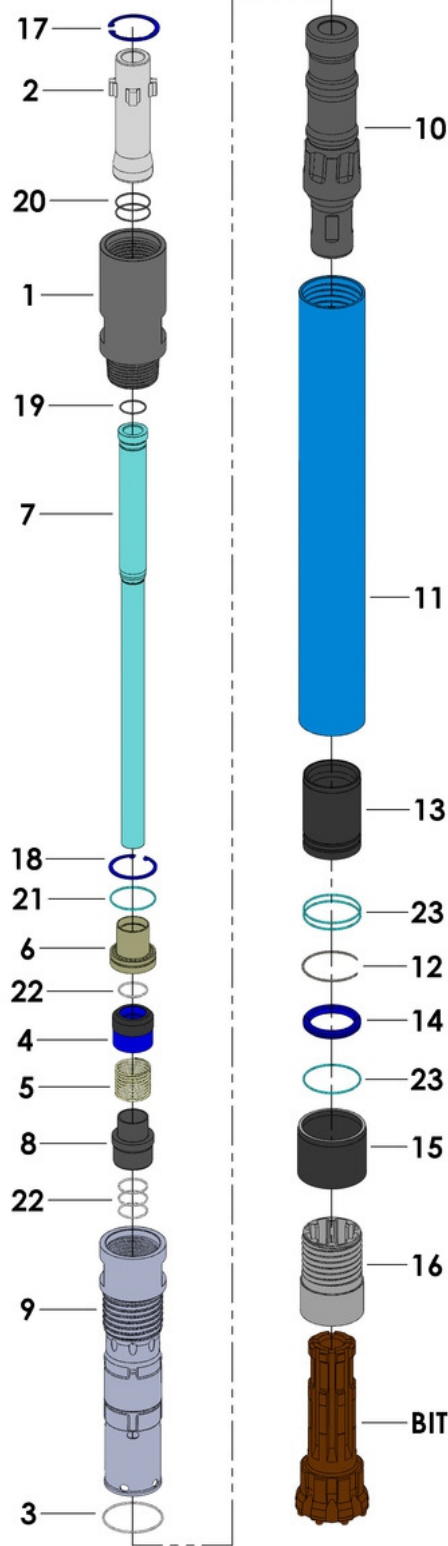


Reverse Circulation Hammer CR42

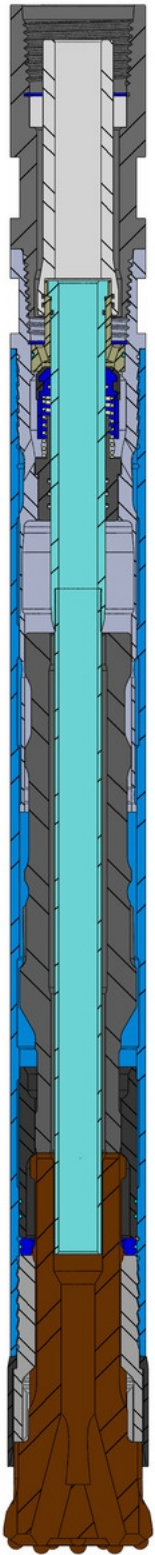

ITEM	ITEM DESCRIPTION	WEIGHT (KG)	NUMBER
1	TOP SUB	8,421	CR42-01
2	ADAPTOR SCREEN	2,617	CR42-02
3	O-RING PARKER 2-154	0,002	CR42-03
4	CHECK VALVE	0,384	CR42-04
5	(VALVE) SPRING	0,085	CR42-05
6	AIR DISTRIBUTOR	0,583	CR42-06
7	SAMPLE TUBE	3,119	CR42-07
8	MOUNT SAMPLE TUBE	0,856	CR42-08
9	INNER CYLINDER	6,804	CR42-09
10	PISTON	11,728	CR42-10
11	WEAR SLEEVE	13,128	CR42-11
12	STOP RING	0,014	CR42-12
13	BUSH DRIVE SUB	2,499	CR42-13
14	BIT RET. RING	0,260	CR42-14
15	SHROUD	0,985	CR42-15
16	DRIVE SUB	2,733	CR42-16
17	CIRCLIP	0,028	CR42-17
18	CIRCLIP	0,025	CR42-18
19	O-RING PARKER 2-129	0,001	CR42-19
20	O-RING PARKER 2-138 (2 PÇS)	0,001	CR42-20
21	O-RING PARKER 2-149	0,001	CR42-21
22	O-RING PARKER 2-132 (4 PÇS)	0,001	CR42-22
23	O-RING PARKER 2-153 (3 PÇS)	0,002	CR42-23

DADOS TÉCNICOS

LENGTH (LESS BIT)	WEIGHT (LESS BIT)	DIAMETER	BIT SHANK	DRILLING RANGE	CONNECTION THREAD
1194 mm	54,3 Kg	Ø 110 mm	RE - 542	Ø 4.1/2" - Ø 5"	METZKE 4" (F)
WORKING PRESSURE	IMPACTE RATE	RECOMMENDED ROTATION SPEED		AIR CONSUMPTION	
15 - 35 BAR	35 Hz	25 - 40 rpm		508 - 1016 PSI	