


TG.HD6 - DTH Hammer

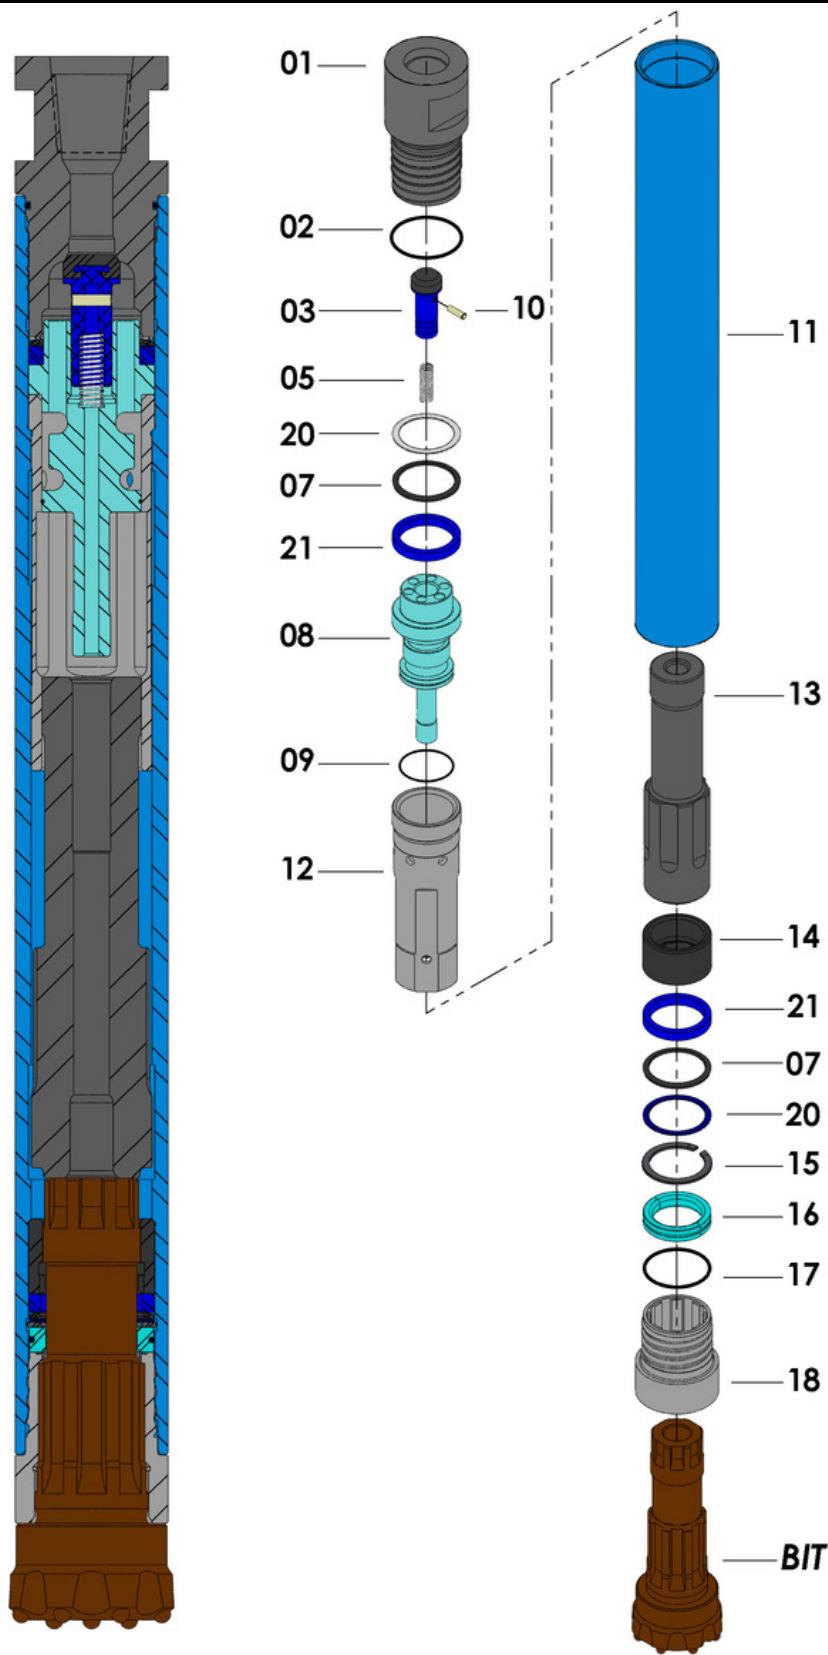

ITEM	ITEM DESCRIPTION	WEIGHT		PART-No.
		(kg)	(lb)	
01	TOP SUB	18.21	40.15	THD6-01
02	TOP SUB O'RING	0.00	0.00	THD6-02
03	CHECK VALVE	0.31	0.69	THD6-03
05	CHECK VALVE SPRING	0.03	0.06	THD6-05
06	SPRING WASHER	0.17	0.37	THD6-06
07	MAKE UP RING	0.09	0.21	THD6-07
08	AIR DISTRIBUTOR	6.51	14.34	THD6-08
09	AIR DIST. O'RING	0.00	0.00	THD6-09
10	PLUG	0.00	0.00	THD6-10
11	WEAR SLEEVE	42.47	93.64	THD6-11
12	CYLINDER	6.09	13.42	THD6-12
13	PISTON	21.58	47.58	THD6-13
14	BIT BEARING	1.89	4.16	THD6-14
15	SNAP RING	0.17	0.36	THD6-15
16	BIT RETAINING RING	0.70	1.55	THD6-16
17	BIT RET. RING O'RING	0.00	0.00	THD6-17
18	DRIVE SUB	5.41	11.94	THD6-18
20	WASHER (2PCS)	0.17	0.37	THD6-20
21	MAKE UP RING 2	0.50	1.10	THD6-21

HAMMER SPECIFICATIONS

LENGTH (WITHOUT BIT)	WEIGHT (WITHOUT BIT)	EXTERNAL DIAMETER	BIT SHANK	BIT RANGE	CONNECTION THREAD
1306 mm 51.4 in	106 Kg 233.7 Lb	136.5 mm 5.37 in	DHD – 360	Ø 6" - 8 1/2"	API 2 3/8" IF (BOX)
WORKING PRESSURE	IMPACT RATE	RECOMMENDED ROTATION SPEED	AIR CONSUMPTION		
150 – 350 PSI 10 – 23,5 BAR	23 Hz	20 – 30 rpm	358 – 938 CFM		