


TG.MS6 - DTH Hammer

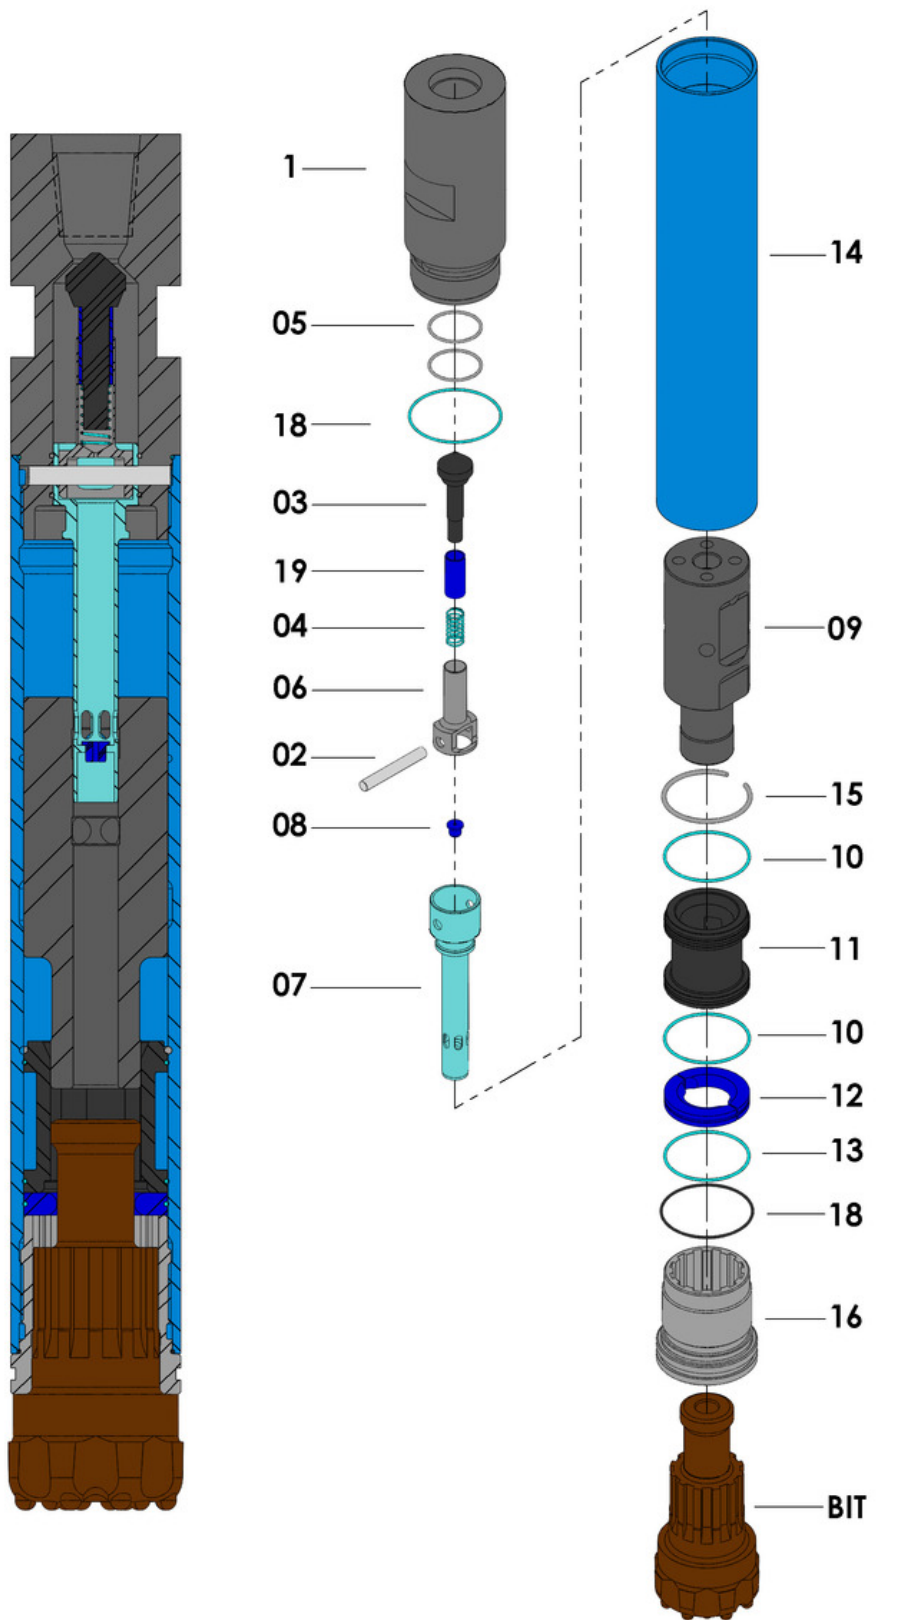

ITEM	ITEM DESCRIPTION	WEIGHT		PART-No.
		(kg)	(lb)	
01	TOP SUB	28.36	62.52	TMS6-01
02	FEED TUBE RETAINER P	0.18	0.40	TMS6-02
03	CHECK VALVE	0.09	0.21	TMS6-03
04	CHECK VALVE O'RING	0.00	0.00	TMS6-04
05	TOP SUB O'RING	0.00	0.00	TMS6-05
06	CHECK VALVE GUIDE	0.39	0.86	TMS6-06
07	FEED TUBE	1.29	2.85	TMS6-07
08	CHOKE SET	0.01	0.01	TMS6-08
09	PISTON	17.17	37.86	TMS6-09
10	GUIDE SLEEVE O'RING (2)	0.00	0.01	TMS6-10
11	GUIDE SLEEVE	4.17	9.19	TMS6-11
12	BIT RETAINING RING	1.01	2.23	TMS6-12
13	BIT RET. RING O'RING	0.00	0.01	TMS6-13
14	WEAR SLEEVE	24.05	53.02	TMS6-14
15	PISTON RETAINER RING	0.09	0.20	TMS6-15
16	DRIVE SUB	5.26	11.59	TMS6-16

HAMMER SPECIFICATIONS

LENGTH (WITHOUT BIT)	WEIGHT (WITHOUT BIT)	EXTERNAL DIAMETER	BIT SHANK	BIT RANGE	CONNECTION THREAD
1029 mm 40.5 in	82 Kg 180.8 Lb	141 mm 5.55 in	MS – 60	Ø 6" - 8 1/2"	API 2 3/8" IF (BOX)
WORKING PRESSURE	IMPACTE RATE	RECOMMENDED ROTATION SPEED	AIR CONSUPTION		
150 – 350 PSI 10 – 23,5 BAR	23 Hz	30 – 40 rpm	343 – 972 CFM		